
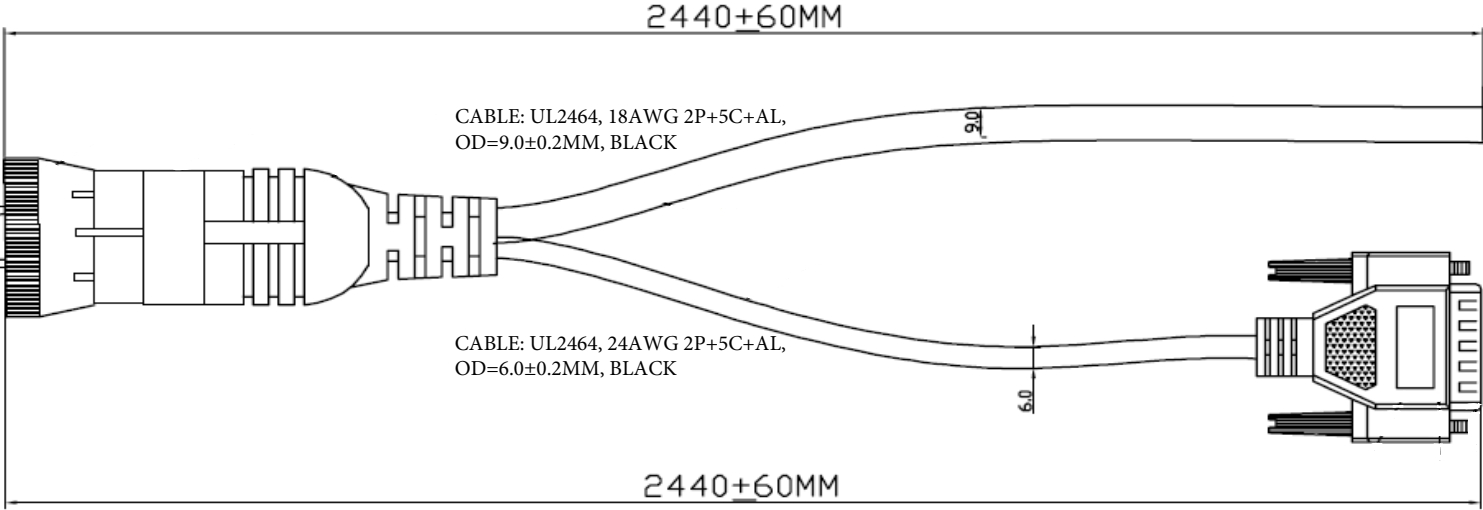


REVISIONS		
Rev.	DESCRIPTION	DATE
A	INITIAL RELEASE	3/23/16

DEUTSCH EQUIVALENT
9P TYPE II PLUG: GREEN
CORE, RED RUBBER
SEAL, INNER ROUND
RING & 9 TERMINALS



CABLE: UL2464, 18AWG 2P+5C+AL,
OD=9.0±0.2MM, BLACK

CABLE: UL2464, 24AWG 2P+5C+AL,
OD=6.0±0.2MM, BLACK

BLUNT END

DB15 MALE

PIN ASSIGNMENT

9P Plug	P2 Blunt end	P3 DB15PM
H — purple	purple	purple — 2
J — blue	blue	blue — 3
A — gray	gray	gray — 6
E — black	black	black — 7
B — red	red	red — 8
D — green	yellow	green — 12
C — yellow	green	yellow — 13
G — orange	brown	orange — 14
F — brown	orange	brown — 15

TESTING

1. Any Open, Short Miswiring & Intermittent are not permitted.
2. Contact Resistance: 5 Ω.
3. Insulation Resistance: 5MΩ/300V DC MIN.
4. This product is RoHS compliant.

<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS [INCH] TOLERANCE ARE: X ±0.5 ANGULAR ±0.5° XX ±0.20 XXX ±0.1000</small>	<small>DRAWN BY:</small> JOE PEREZ	
	<small>CHECKED BY:</small>	
	<small>APPROVED BY:</small> O.Acuña	<small>TITLE:</small> CAN II J1939 9 PIN PLUG 8 FT TO DB15 MALE & BLUNT CUT
PROPRIETARY AND CONFIDENTIAL		<small>OC P/N:</small> 11760-03-226
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OCP GROUP INC. PARTIAL OR TOTAL REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF OCP GROUP INC IS PROHIBITED.</small>		<small>DRAWING NO:</small>
<small>UNITS:</small> MM	<small>SCALE:</small> FREE	<small>SIZE:</small> A4
		<small>REV:</small> A
		<small>SHEET 1 OF 1</small>