

WIRING SCHEMATIC

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	16
11	15
12	14
13	13
14	12
15	11
16	10
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
31	31
32	32
33	33
34	34

NOTE:

1 POSITION LABEL ON FAR SIDE AS SHOWN.


1629-1TM
OCP XWO#X



THIS PRODUCT CONTAINS PROPRIETARY INFORMATION OF OCP GROUP, INC. AND IS SUBJECT TO THE CONDITIONS THAT THE INFORMATION: (A) BE RETAINED IN CONFIDENCE. (B) NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART. (C) NOT BE USED INCORPORATED IN ANY PRODUCT EXCEPT ON AN EXPRESS WRITTEN AGREEMENT WITH OCP GROUP, INC.

REVISIONS

DATE	REV	ECN	DESCRIPTION	APP'D
-	A	-	INITIAL RELEASE	MC
-	B	2522	ADDED LABEL	KW

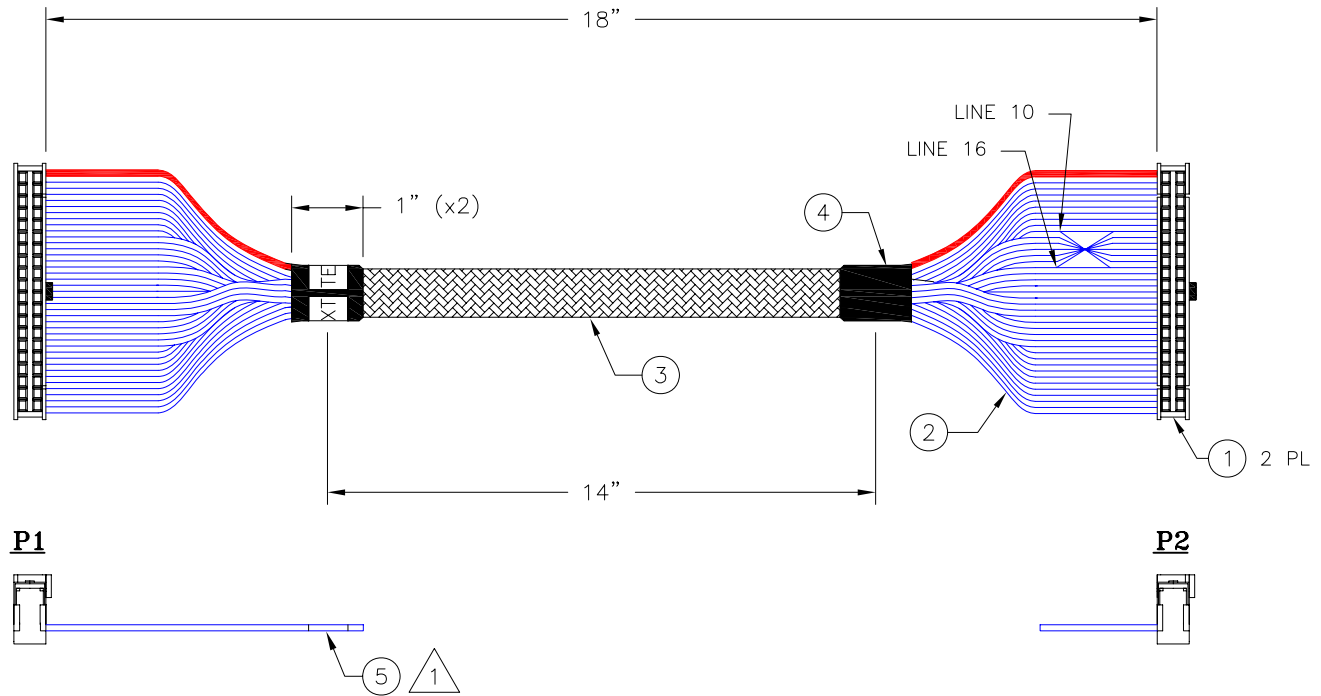

ITEM	DESCRIPTION/REMARKS	QTY	UNLESS OTHERWISE SPECIFIED
7			CABLE TOLERANCE
6			UP TO 12" [304.8] .5" [12.7]
5	WRAP AROUND LABEL	1	ABOVE 12" [304.8] .75" [19.05]
4	HEAT SHRINK 1/2" POLYOLEFIN	2	ABOVE 24" [609.6] 5%
3	BRAIDED SLEEVING 1/2" EXPANDABLE POLYESTER	1	ANGLES = ±1/2 DEGREE
2	RIBBON CABLE, 28AWG, U.L., 34 COND., SLIT	A/R	CONNECTOR TOLERANCE
1	IDC 34 SOCKET W/ POLARIZATION TAB	2	.XXX± LINEAR
			.XX± LINEAR

OCP
SAN DIEGO, CA USA

TITLE: **CABLE ASSY FLOPPY 18" 1 DEVICE**

SCALE: NTS DATE: 07/18/06
UNITS: INCH CHK'D: NP
DRAWN BY: OA APP'D: NP

OCP PART NO.: 1629-1TM
CUSTOMER: TradeMark
SIZE: A DRAWING NUMBER: 1629-1TM REV: B SHEET: 1/1