

NOTES:


1. PINOUT 1:1.
2. ELECTRICAL TEST:
 - 2.1 100% OPEN, SHORT, MIS-WIRE TEST
 - 2.2 INSULATION RESISTANCE: 1MΩ MIN.



THIS PRODUCT CONTAINS PROPRIETARY INFORMATION OF OCP GROUP, INC. AND IS SUBJECT TO THE CONDITIONS THAT THE INFORMATION: (A) BE RETAINED IN CONFIDENCE. (B) NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART. (C) NOT BE USED INCORPORATED IN ANY PRODUCT EXCEPT ON AN EXPRESS WRITTEN AGREEMENT WITH OCP GROUP, INC.

REVISIONS

DATE	REV	ECN	DESCRIPTION	APP'D
-	A	-	INITIAL RELEASE	OA

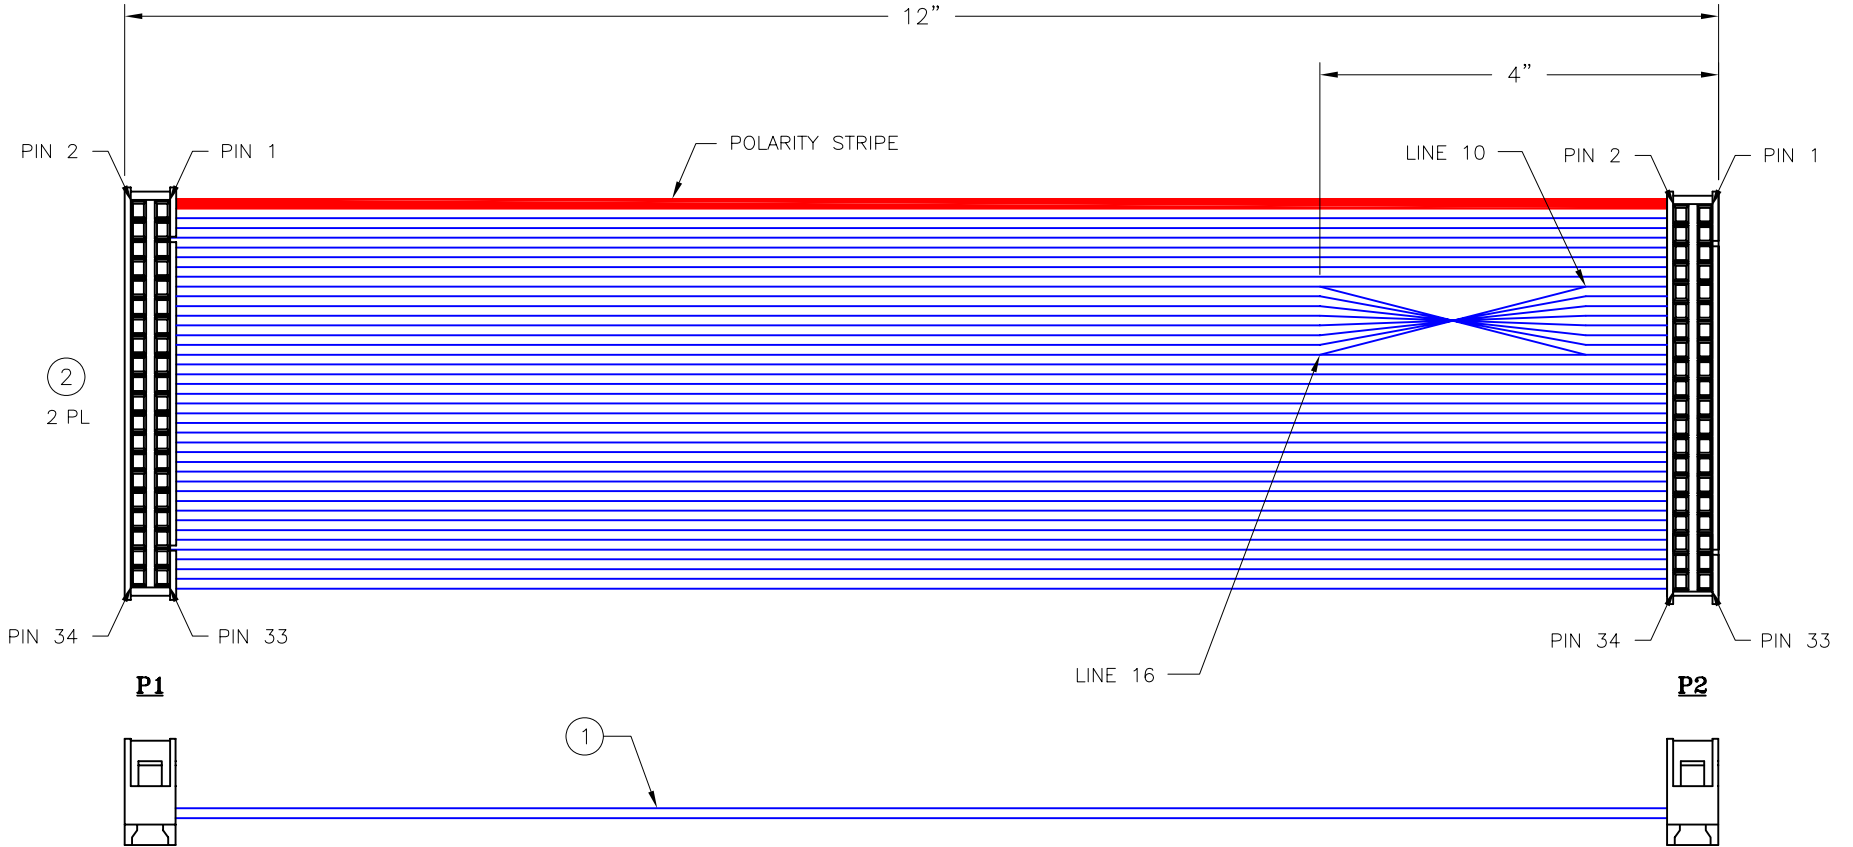

ITEM	DESCRIPTION/REMARKS	QTY	UNLESS OTHERWISE SPECIFIED	OCP SAN DIEGO, CA USA		TITLE: FLOPPY DRIVE CABLE, 12" CABLE ASSY	
4			CABLE TOLERANCE	SCALE: NTS DATE: 10/11/06 UNITS: INCH CHK'D: NP DRAWN BY: OA APP'D: NP		OCP PART NO.: 55-00116	
3			UP TO 12" [304.8] .5" [12.7]			CUSTOMER: TBD	
2	CONNECTOR: PITCH 2.54mm 34P IDC SOCKET, W/O S.R., W/O POLARIZATION; INSULATOR: PBT+GLASS FIBER, COLOR: BLK; CONTACT: COPPER ALLOY, GOLD FLASH OVER NICKEL PLATED	2	ABOVE 12" [304.8] .75" [19.05] ABOVE 24" [609.6] 5%			SIZE: A	DRAWING NUMBER: 55-00116
1	FLAT CABLE: UL2651 28AWG, TINNED & STRNDED COPPER WIRE; CABLING: 34 COND. PITCH=1.27mm; INSULATOR: PVC, COLOR: GRAY	A/R	ANGLES = ±1/2 DEGREE				
			CONNECTOR TOLERANCE				
			.XXX± LINEAR				
			.XX± LINEAR				