



REVISIONS			
REV.	DESCRIPTION	DATE	ECR NO.
A	Initial Release	Mar.17.2020	

OCP PN	LENGTH
61-00300-01	1000 ± 30 mm
61-00300-02	2000 ± 60 mm



152.4 ± 10 mm

25 ± 5 mm

61-00300-0X
WWYY

UL2464 28AWGx9C+Al Foil+Drain Wire, Black PVC Jacket, OD: 5.0mm (80°C, 300V)


M2x0.4P Screw, 13mm,
Iron, Nickel Plated (x2)



P2
Samtec 1.27mm
Dual Row 10P

Packing:

61-00300-0X
WWYY

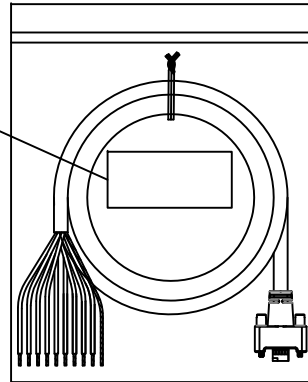

WIRE TERMINATIONS

	P1
Black	1
Red	2
Brown	3
Orange	4
Yellow	5
Green	6
Blue	7
Violet	8
Gray	9
Drain Wire	10

NOTES:

1.ELECTRICAL CHARACTERISTICS:

- <1>100% OPEN SHORT&MISS WIRE TEST
- <2>CONTACT RESISTANCE: 1 ohm<MAX>.
- <3>INSULATION RESISTANCE:DC 100V 10ms 5M ohm(MIN).

Table 1. Bill of Materials

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS (INCH)	DRAWN BY KIRA
TOLERANCES ARE: .X ±0,5 .XX ±0,20 .XXX ±0,100 ANGULAR ±0,5°	CHECKED BY PETER
	APPROVED BY

OCP Group, Inc.

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OCP GROUP INC. PARTIAL OR TOTAL REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF OCP GROUP INC IS PROHIBITED.

CUSTOMER NAME:	TITLE: CBL, DALSA GENIE-FLYING LEAD
CUSTOMER P/N:	OCP P/N: 61-00300-0x
CUSTOMER REV. LEVEL:	DRAWING NO: S5018-x
PROJECT NO:	REV: A
UNITS:	SCALE:
SIZE:	SHEET 1 OF 1