

REVISIONS		
Rev.	DESCRIPTION	DATE
A	INITIAL RELEASE	12/22/2016

"See Table A"

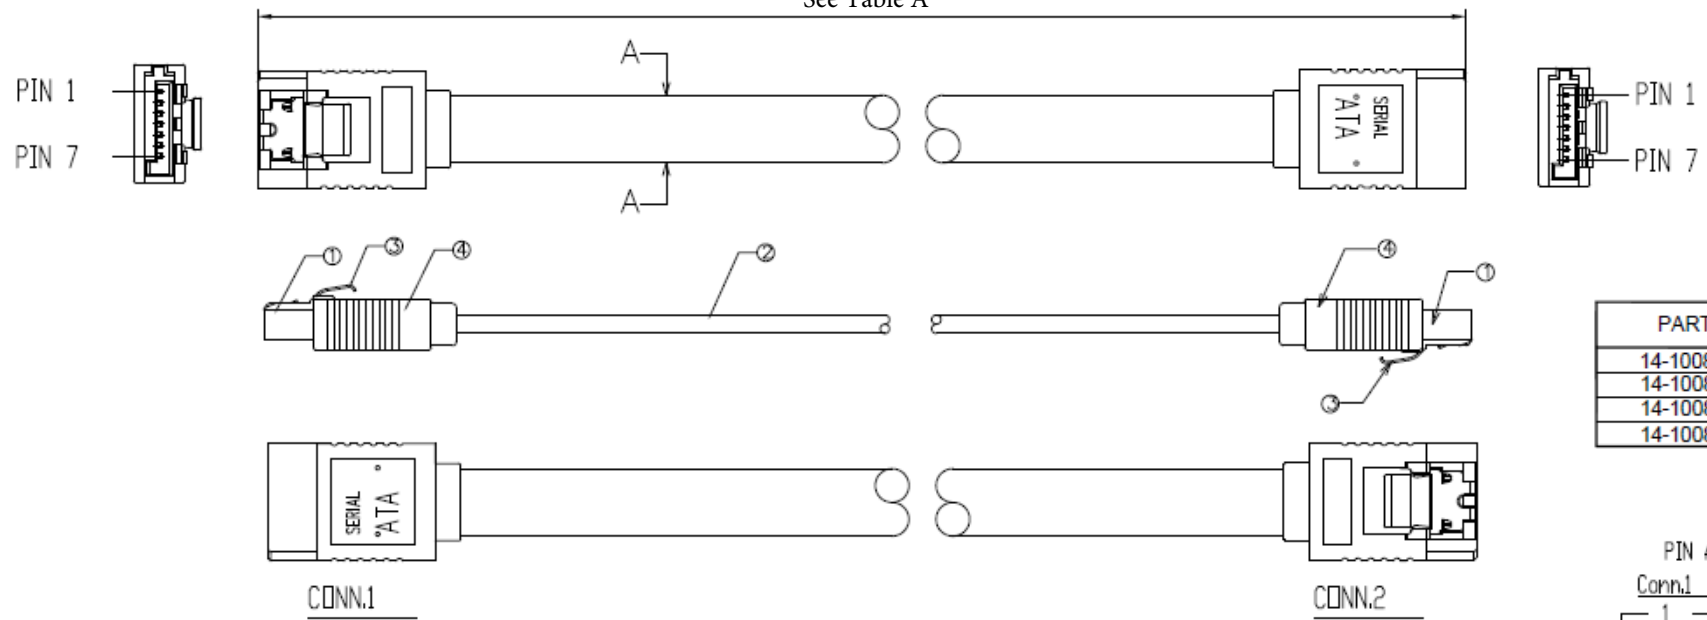


TABLE A

PART NO.	LENGTH
14-10080-001	20"
14-10080-002	14"
14-10080-003	16"
14-10080-004	8"

PIN ASSIGNMENT

Conn.1	Conn.2	Signal
1	1	GND
2	2	A+
3	3	A-
4	4	GND
5	5	B-
6	6	B+
7	7	GND

Detail A-A Scale: Free Wire Specification

Drain 2

PVC Jacket

Insulation: FM-PE

Drain 1: 28AWG (1/0.32) TC

Almylar

Conductor: 26AWG (1/0.404) TC

Drain 3

④	OVER MOLDING	45P PVC COLOR BLACK	0.0067	Kg
③	SATA LATCH	SATA 7P SHORT LATCH	2	pcs
②	SATA CABLE	UL 2725 (26AWG*1P)*2+AL+28AWG*3D COLOR: RED OD: 2.20*7.80±0.20mm	346	mm
①	SATA CONN	SATA-7P BLACK MOLDING G/F WITH LATCH	2	pcs
NO.	PART NO.	DESCRIPTION	Q'TY	UNIT

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCE ARE:
X ±0.5 ANGULAR ±0.5°
XX ±0.20
XXX ±0.1000

DRAWN BY: Joe Perez

CHECKED BY:

APPROVED BY: O. Acuna



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OCP GROUP INC. PARTIAL OR TOTAL REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF OCP GROUP INC IS PROHIBITED.

TITLE: CBL, SATA, W/LATCH, STRAIGHT-STRAIGHT, RoHS

OCP P/N: 14-10080-XXX

DRAWING NO: REV: A

UNITS: IN SCALE: FREE SIZE: A4 SHEET 1 OF 1